


# CLARK TRACKS

high performance for maximum work life

## Supply of Tracks

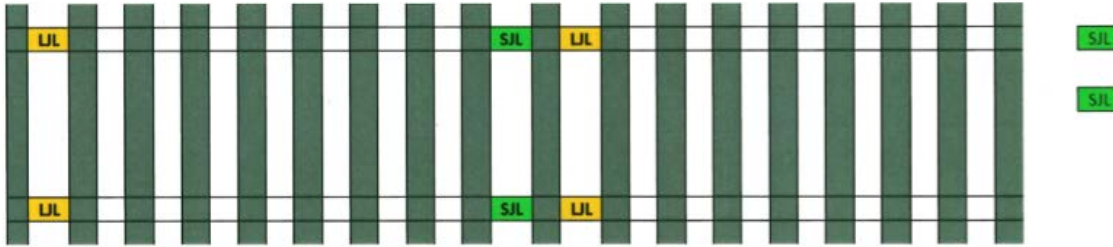


Each track is supplied with:

- 4 Short Joining Links (SJL)
- 4 Long Joining Links (LJL)

Each PAIR of tracks with 8 x SJL and 8 x LJL (also 1 x tensioner and fitting staples (2 pieces)


Easy fitting and adjustment

Few loose links; less chance of links being lost in transit or storage

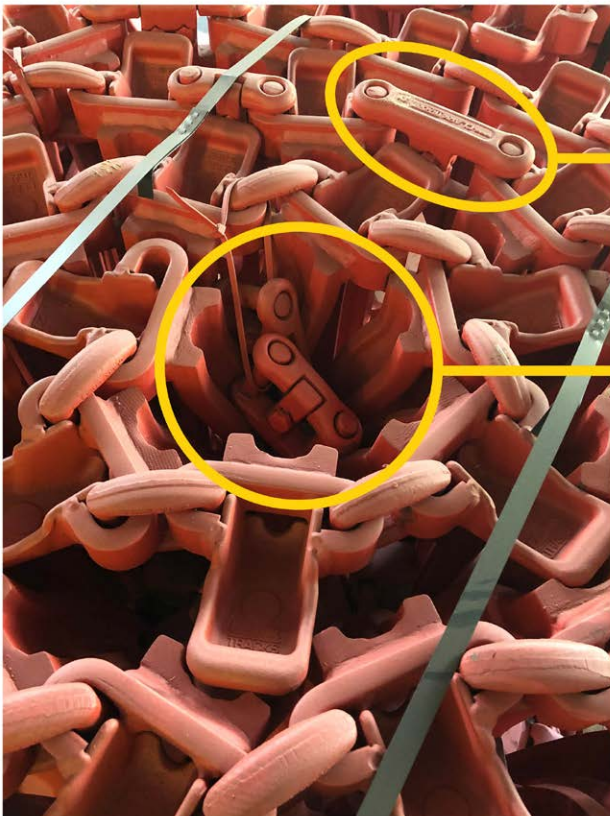

Joining link already installed, connecting two quarters of coiled track.

Remaining joining links hang in center, ready for future installation.

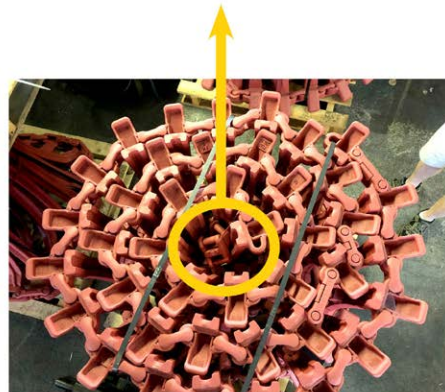

Optimum track tension is to have 40-70mm of sag between the tires.  
Tire pressure should be full inflated.